

# Neles™ trunnion mounted full bore ball valves

## Series X

Neles series X is a trunnion modular ball valve. Neles X series valves incorporate robust stem to ball connection. This assures valves are delivering solid long lasting performance in high cycle isolation and control applications. Application based seat selection assures valves are capable of delivering long lasting tightness even in most demanding applications including abrasive fluids and solids handling. Valve modularity widens the options in material selections to meet application specific requirements. Valves are also capable of delivering excellent control accuracy together with Neles Q-trim™ anti-cavitation and noise reduction trim technology. Valve series meets modern industry requirements concerning safety and emissions.

### Applications

- Oil and gas production
- Chemical and petrochemical plants
- Power plants
- Liquids, gas and steam
- High temperature service
- Hydrocarbons
- Catalyst handling
- Solids handling
- Polymers
- Control and tight shut-off applications
- High cycling
- Emergency applications ESD/ESV
- LNG
- Natural gas

### Sizes/Pressure classes


- 2"... 24" / ASME Class 150 & 300
- For ASME Class 600 and larger sizes refer to bulletin 1D21.

### Trunnion mounted

- Low operating torque.
- Fully rated seats.
- Smooth control.
- Double block & bleed.
- Quick operations.
- High cycle capability.

### Full bore

- Maximum Cv per nominal size.
- Cylindrical flow path allows low flow resistance.
- Full bore design for API requirements.

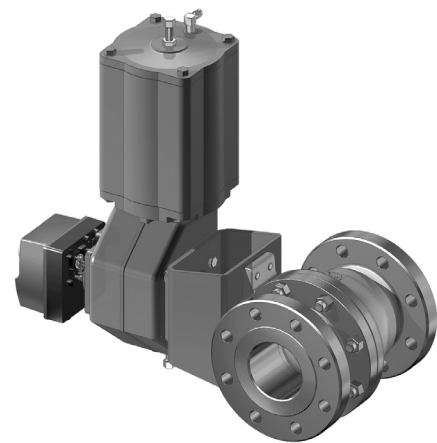

### Increased safety

- V-ring gland packing ensures long maintenance free operation and low emission level.
- Live-loaded construction as standard.
- Fire tested API 607, with selected constructions and seat designs.
- Spiral wound body joint gasket.
- Anti-blowout shaft.

### Tightness

- Durable two-way ISO 5208 Rate C or ANSI Class V tightness as standard with spring-loaded metal seats.
- Available with improved tightness rates.
  - API 598 for metal seats above 2".
- ISO 5208 Rate B or ANSI Class VI shut-off as standard with soft seats.


### Minimized emissions

- Live-loaded gland packing.
  - ISO 15848-1
  - API 641
  - TA-Luft with graphite packing
  - Clean Air Act.
- Off-center body joint.
  - Uninterrupted circular spiral wound body gasket.
  - No bending forces to gland packing.

### Excellent control characteristics

- Equal percentage inherent characteristic.
- Self flushing, low noise anti-cavitation Q-Trim is optional.
- High noise reduction Q2-trim™ for gas applications.


## Exploded view

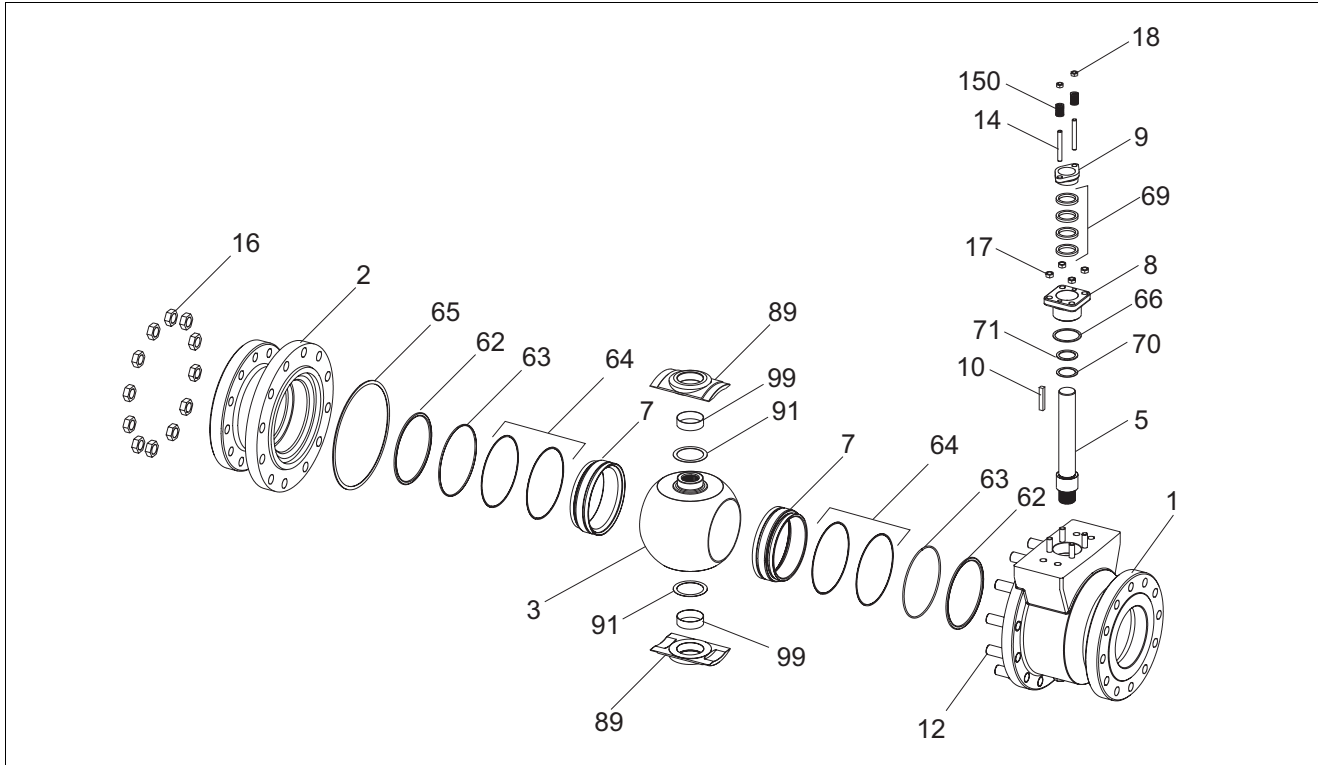

## Parts list

Item	Part description	Material		
1	Body	Stainless steel CF8M	Carbon steel WCB	Chrome Moly C5
2	Body cap	Stainless steel CF8M	Carbon steel WCB	Chrome Moly C5
3	Ball	Stainless steel AISI 316 / CF8M		Stainless steel 410
5	Shaft	Stainless steel 17-4PH / XM-19		
7	Ball seat	Stainless steel + cobalt based alloy / PTFE or filled PTFE		Stainless steel 410 +CrC
8	Bonnet	Stainless steel CF8M	Carbon steel WCB	Chrome Moly C5
9	Gland	Stainless steel CF8M		
10	Key	Stainless steel AISI 329		
12	Stud	ASTM A 193 gr. B8M	ASTM A 320 gr. L7M	
13	Stud	ASTM A 193 gr. B8M	ASTM A 320 gr. L7M	
14	Stud	ASTM A 193 gr. B8M	ASTM A 320 gr. L7M	
16	Hexagon nut	ASTM A 193 gr. 8M	ASTM A 194 gr. 2 HM	
17	Hexagon nut	ASTM A 193 gr. 8M	ASTM A 194 gr. 2 HM	
18	Hexagon nut	ASTM A 193 gr. 8M	ASTM A 194 gr. 2 HM	
62	Seat spring	Alloy 825		
63	Back seal	PTFE or graphite		
64	Back-up ring	PTFE		
65	Body gasket	Stainless steel AISI 316 + PTFE or graphite filled spiral wound		
66	Bonnet gasket	PTFE or graphite		
69	Packing ring	PTFE or graphite		
70	Thrust bearing	PTFE or cobalt based alloy		
71	Thrust bearing	Cobalt based alloy		
89	Trunnion plate	Stainless steel, ASTM A 351 gr. CF8M	Stainless steel, ASTM A743 gr. CA15	
91	Bearing spacer	Cobalt based alloy		
99	Trunnion bearing	PTFE + Stainless steel		
150	Disc spring set	Electroless nickel plated spring steel (EN 10083-1.8159)		

Exploded view

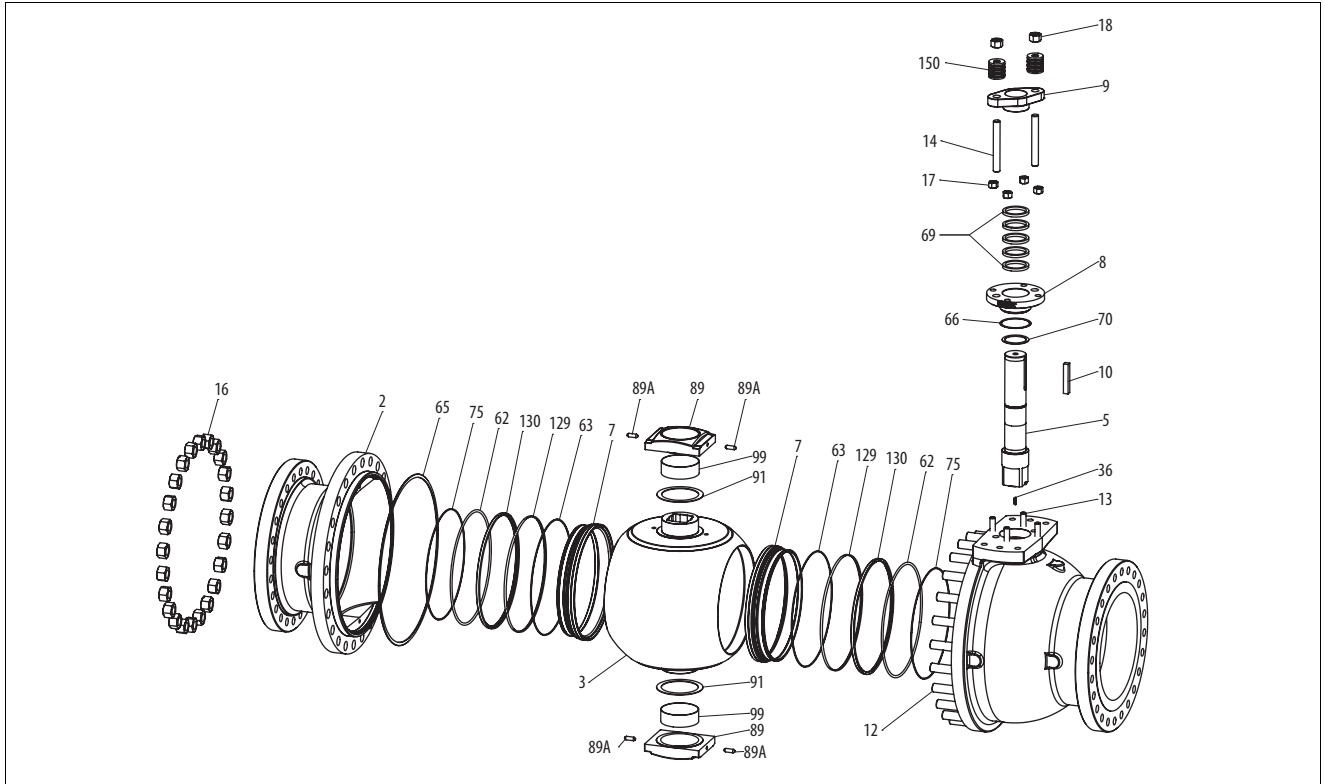

Parts list

ITEM	PART DESCRIPTION	Material	
		STAINLESS STEEL	CARBON STEEL WCB
1	Body	Stainless steel CF8M	Carbon steel WCB
2	Body cap	Stainless steel CF8M	Carbon steel WCB
3	Ball	Stainless steel AISI 316 / CF8M	Stainless steel AISI 316 / CF8M
5	Shaft	Stainless steel 17-4PH / XM-19	Stainless steel 17-4PH / XM-19
7	Seat	Stainless steel AISI 316 + cobalt based alloy / Stainless steel AISI 316 + CrC / TC2 / PTFE	Stainless steel AISI 316 + cobalt based alloy / Stainless steel AISI 316 + CrC / TC2 / PTFE
8	Bonnet	Stainless steel CF8M	Carbon steel WCB
9	Gland	Stainless steel CF8M	Stainless steel CF8M
10	Key	Stainless steel AISI 329 / UNS S31803	Stainless steel AISI 329 / UNS S31803
12	Stud	ASTM A 193 gr. B8M	ASTM A 320 gr. L7M
13	Stud	ASTM A 193 gr. B8M	ASTM A 320 gr. L7M
14	Stud	ASTM A 193 gr. B8M	ASTM A 320 gr. L7M
16	Hexagon nut	ASTM A 194 gr. 8M	ASTM A 194 gr. 7M
17	Hexagon nut	ASTM A 194 gr. 8M	ASTM A 194 gr. 7M
18	Hexagon nut	ASTM A 194 gr. 8M	ASTM A 194 gr. 7M
36	Anti-static spring	DIN 17224-1.4310	DIN 17224-1.4310
62	Seat spring	UNS N06625	UNS N06625
63	Braided seal square	Graphite	Graphite
65	Body seal	Stainless steel AISI 316 + PTFE / graphite	Stainless steel AISI 316 + PTFE / graphite
66	Bonnet gasket	Graphite / PTFE	Graphite / PTFE
69	Packing ring	Graphite / PTFE	Graphite / PTFE
70	Thrust bearing	AISI 316 + PTFE / Coated metal	AISI 316 + PTFE / Coated metal
75	Braided seal square	Graphite	Graphite
89	Trunnion plate	Stainless steel CF8M	Stainless steel CA15
89A	Pin	A564 gr. 630 H1150D / ASTM A479 gr. XM-19	A564 gr. 630 H1150D / ASTM A479 gr. XM-19
91	Thrust bearing	AISI 316 + PTFE / Coated metal	AISI 316 + PTFE / Coated metal
99	Trunnion bearing	AISI 316 + PTFE / Coated metal	AISI 316 + PTFE / Coated metal
129	Back seal	Graphite	Graphite
130	Support ring	AISI 316	AISI 316
150	Disc spring set	AISI 304	AISI 304

## Technical specification

### Product type

Full bore trunnion mounted ball valve.  
Split body design.  
Flanged.

### Pressure ratings

ASME Class 150 and 300.

### Size range

2" ... 24" in ASME Class 150 & 300.

### Temperature range

-50 ... +400 °C / -60 ... +750 °F, consult factory for higher temperature applications.

### Design standard

Valve body ASME B16.34.  
Valve flanges ASME B16.5.  
Face-to-face ASME B16.10 long pattern.  
Actuator mounting ISO 5211.

### Standard materials

Body ASTM A216 gr. WCB.  
ASTM A351 gr. CF8M.  
Ball ASTM A351 gr. CF8M/AISI 316 +  
hard chrome plating with metal seats.  
Bearings PTFE or cobalt based alloy.  
Seats AISI 316+cobalt based alloy.  
AISI 316+PTFE insert.  
Seals/gaskets PTFE, graphite.  
Body gaskets Spiral wound with PTFE or graphite filler.  
Gland packing PTFE (V-ring) or graphite with live loaded construction.

Bolting B8M/8M with stainless steel body.  
L7M/2HM with carbon steel body.

### Standard options

High temperature linkages.  
Oxygen construction for gaseous oxygen service.  
High temperature design.  
Carbide or NiBo ball coating.  
Q-TRIM design (2" ... 24")  
Q2-TRIM design (2" ... 16")  
NACE MR-01-03 as standard, NACE MR-01-75 on request.

### Material and test certification

EN 10204-3.1 material certificates for body and bonnet.  
Tightness test certificate.

### Fire tested

API 607, with D, B, K, G and H seats.


### Valve testing

Each valve is tested for body integrity and seat tightness.  
The body test pressure is 1.5 x PN. The seat test pressure is 1.1 x PN. Test medium is inhibited water.  
Air test upon request.


### Valve tightness

ISO 5208 Rate C or Class V for metal seats.  
ISO 5208 Rate B or Class VI for soft seats.  
Other tightness rates upon request.

Maximum allowable  $\Delta p$  in control service

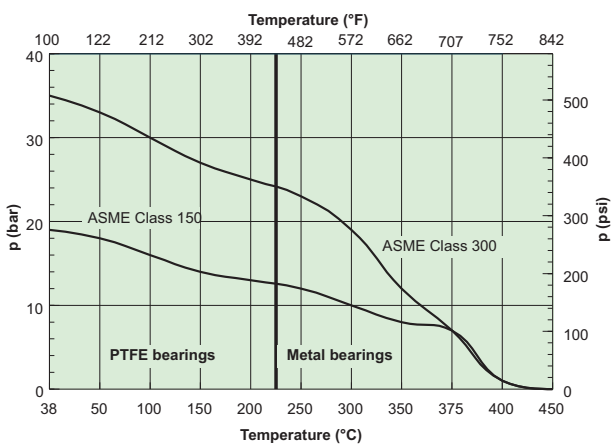






Maximum allowable  $\Delta p$  in on-off service

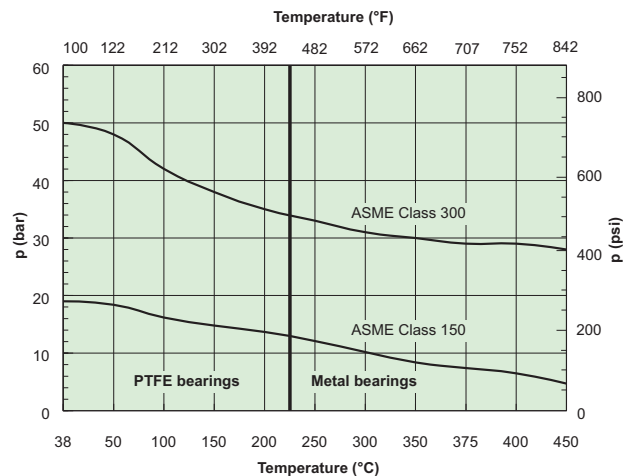

- PTFE/metal bearings
- Chrome plated ball
- PTFE/metal bearings
- Chrome plated ball


Note: When Carbide or Nickel Boron coatings are used according to given technical limitations, max body material P/T values can be used. Always consider shaft strength, consult factory.

Standard seat constructions and materials
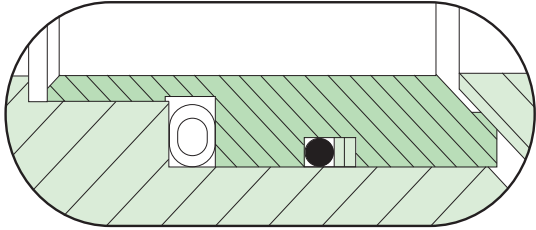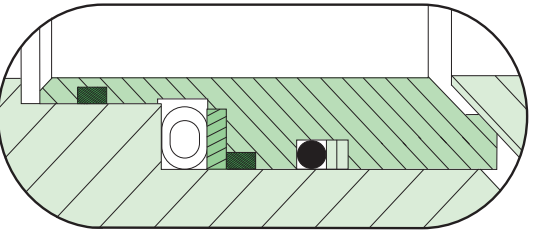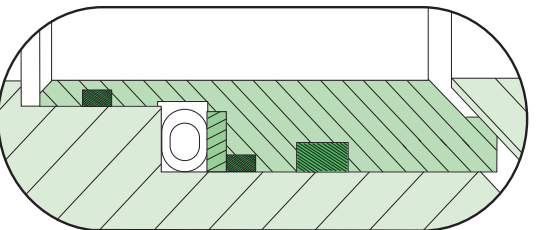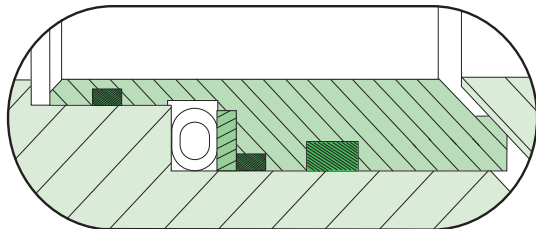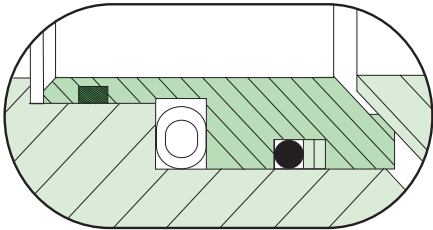
<p><b>S Metal seat</b></p> 	<p>Ball seat: Stainless steel + hard facing.            Seat seal: Viton® GF O-ring.            Spring: INCONEL® 625.            Temp. range: -30 ... +200 °C / -22 ... +390 °F.</p>
<p><b>B Solids proof metal seat</b></p> 	<p>Ball seat: Stainless steel + hard facing.            Seat seal: Viton® GF O-ring/graphite.            Spring: INCONEL® 625.            Temp. range: -30 ... +200 °C / -22 ... +390 °F. Fire safe</p>
<p><b>K High temperature solids proof metal seat</b></p> 	<p>Ball seat: Stainless steel + hard facing.            Seat seal: Graphite/graphite            Spring: INCONEL® 625.            Temp. range: -50 ... 450 °C / -60 ... +840 °F.            Leakage class: upto ISO Rate D / FCI 70.2 Class V (water)            Fire safe</p>
<p><b>G High temperature solids proof metal seat</b></p> 	<p>Ball seat: Stainless steel + hard facing.            Seat seal: Graphite/graphite            Spring: INCONEL® 625.            Temp. range: -50 ... 425 °C / -60 ... +800 °F.            Leakage class: upto FCI 70.2 Class VI            Fire safe</p>
<p><b>A Short polymer proof seat</b></p> 	<p>Ball seat: Stainless steel + hard facing.            Seat seal: Viton GF O-ring / Graphite.            Temp. range: - 30 ... +200 °C / -22 ... +390 °F.            Note: - Size 8" only</p>


## Standard seat constructions and materials

### L Polymer proof seat

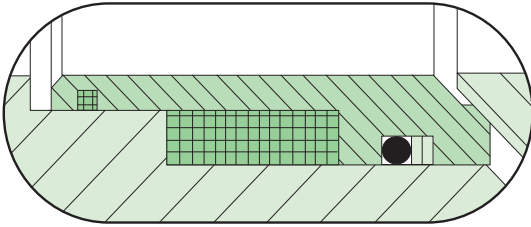


Ball seat: Stainless steel + hard facing.  
 Seat seal: Viton GF O-ring / Graphite.  
 Temp. range: - 30 ... +200 °C / -22 ... +390 °F.  
 Note: - Sizes 2" - 8"  
 - Size 10" with single seat design only.

### H Bellows seat

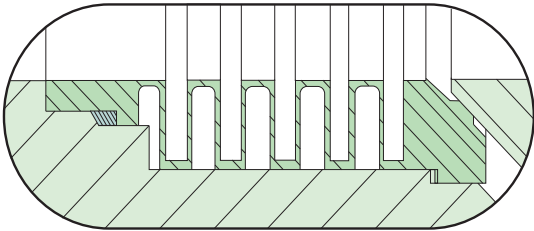


Ball seat: Stainless steel + hard facing.  
 Seat seal: Graphite.  
 Temp. range: -50 ... +400 °C / -60 ... +750 °F.  
 Note: For temperature above +400 °C/+750 °F please consult factory.  
 Not available for XM (Class 150) sizes 2"-6" / DN 50-150 Fire safe

### T Soft seat

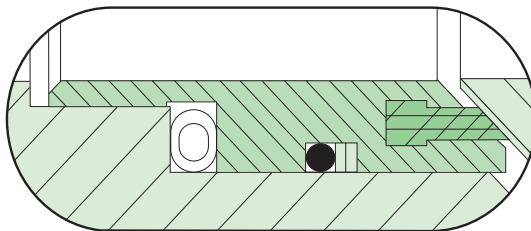

Ball seat: PTFE.  
 Seat body: Stainless steel.  
 Seat seal: Viton GF O-ring.  
 Spring: INCONEL 625.  
 Temp. range: -30 ... +200 °C / -22 ... +390 °F.

### D Soft seat, fire safe

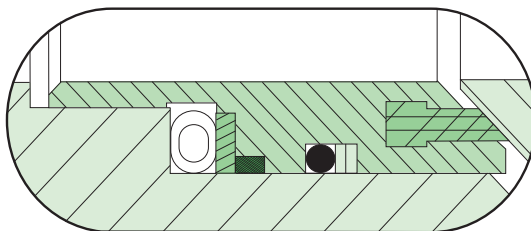

Ball seat: PTFE.  
 Seat body: Stainless steel.  
 Seat seal: Viton GF O-ring.  
 Spring: INCONEL 625.  
 Temp. range: -30 ... +200 °C / -22 ... +390 °F.  
 Fire safe

## Actuator selection

X-series valve can be equipped with the following Neles actuator types:

**B1C/B1J** Pneumatic double acting or spring return actuator.  
 Actuators available for size range DN 50 - 600 / 2"-24"  
 B1C/B1J actuators have an ISO 5211 mounting face.


**M** Gear operator for valve sizes DN 50-300 / 2"-12".

When selecting other actuators, please contact your local Valmet representative.

For the correct actuator selection in on-off service, you need to know the following process data:

- valve size and seat type
- supply pressure for the actuator
- maximum shut-off pressure across the valve.

## Dimensions

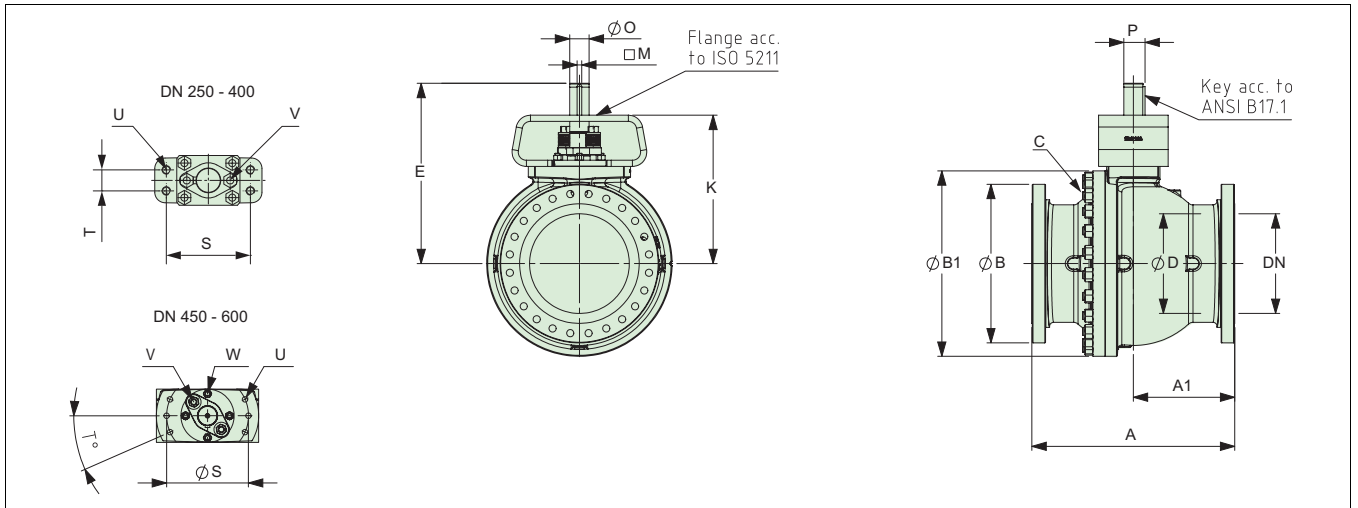

### ASME 150

DN	ISO FLANGE	DIMENSIONS, mm										WEIGHT kg
		A	A1	ØB	ØB1	ØD	E	K	□M	ØO	P	
50	F07, F10	178	79	150	146	50.8	203	168	4.76	20	22.16	10
80	F07, F10, F12, F14	203	96.5	190	190	76.2	225	190	4.76	20	22.16	22
100	F10, F12, F14	229	112	230	241	101.6	296	250	6.35	25	27.75	32
150	F14, F16	394	197	280	338	152.4	373	305	9.53	40	44.23	75
200	F14, F16, F25	457	229	343	426	203.2	453	385	9.53	40	44.23	190
250	F14, F16, F25, F30	533	267	407	514	254	562	472	12.7	55	60.6	325
300	F14, F16, F25, F30	610	305	483	592	304.8	605	515	12.7	55	60.6	480
350	F16, F25, F30, F35	686	343	533	665	340	741	607	19.05	75	83.15	635
400	F16, F25, F30, F35	762	381	597	750	390	779	633	22.23	85	94.63	840
450	F30, F35	864	457	635	800	436	793.9	645.7	22.23	85	95.68	1001
500	F30, F35	914	495.5	700	885	487	811	665	22.23	85	95.68	1304
600	F25, F30, F35, F40	1067	571.5	815	1041	589	987	831	22.23	95	105.87	2087

Face-to-face dimension acc. to ANSI B16.10, Table 1, long pattern

### ASME 300

DN	ISO FLANGE	DIMENSIONS, mm										WEIGHT kg
		A	A1	ØB	ØB1	ØD	E	K	□M	ØO	P	
50	F07, F10	216	89	165	146	50.8	203	168	4.76	20	22.16	15
80	F07, F10, F12, F14	282	141	210	200	76.2	225	190	4.76	20	22.16	32
100	F10, F12, F14	305	152	255	254	101.6	296	250	6.35	25	27.75	58
150	F14, F16	403	201	320	353	152.4	373	305	9.53	40	44.23	125
200	F14, F16, F25	502	249	380	462	203.2	453	385	9.53	40	44.23	225
250	F14, F16, F25, F30	568	284	445	580	254.0	562	472	12.70	55	60.60	330
300	F14, F16, F25, F30	648	324	520	652	304.8	605	515	12.70	55	60.60	610
350	F16, F25, F30, F35	762	381	585	700	340.0	741	607	19.05	75	83.15	800
400	F16, F25, F30, F35	838	419	650	799	390.0	779	633	22.23	85	94.63	1015
450	F30, F35	914	389.5	710	825	436	793.9	645.7	22.23	85	95.68	1235
500	F25, F30, F35, F40	991	457	775	906	487	881	725	22.23	95	105.87	1692
600	F35, F40	1143	533.5	915	1060	589	1090	885	31.75	120	136.54	2636

Face-to-face dimension acc. to ANSI B16.10, Table 1, long pattern

## ASME 150

Size	ISO FLANGE	DIMENSIONS, inch										WEIGHT lbs
		A	A1	ØB	ØB1	ØD	E	K	□M	ØO	P	
2	F07, F10	7.01	3.11	5.91	5.75	2.00	7.99	6.61	0.19	0.79	0.87	22
3	F07, F10, F12, F14	7.99	3.80	7.48	7.48	3.00	8.86	7.48	0.19	0.79	0.87	48.4
4	F10, F12, F14	9.02	4.41	9.06	9.49	4.00	11.65	9.84	0.25	0.98	1.09	70.4
6	F14, F16	15.51	7.76	11.02	13.31	6.00	14.69	12.01	0.38	1.57	1.74	165
8	F14, F16, F25	17.99	9.02	13.50	16.77	8.00	17.83	15.16	0.38	1.57	1.74	418
10	F14, F16, F25, F30	20.98	10.51	16.02	20.24	10.00	22.13	18.58	0.50	2.17	2.39	715
12	F14, F16, F25, F30	24.02	12.01	19.02	23.31	12.00	23.82	20.28	0.50	2.17	2.39	1056
14	F16, F25, F30, F35	27.01	13.50	20.98	26.18	13.39	29.17	23.90	0.75	2.95	3.27	1397
16	F16, F25, F30, F35	30.00	15.00	23.50	29.53	15.35	30.67	24.92	0.88	3.35	3.73	1848
18	F30, F35	34.02	17.99	25.00	31.50	17.17	31.26	25.42	0.88	3.35	3.77	2224
20	F30, F35	35.98	19.51	27.56	34.84	19.17	31.93	26.18	0.88	3.35	3.77	2898
24	F25, F30, F35, F40	42.01	22.50	32.09	40.98	23.19	38.86	32.72	0.88	3.74	4.17	4638

Face-to-face dimension acc. to ANSI B16.10, Table 2, long pattern

## ASME 300


Size	ISO FLANGE	DIMENSIONS, inch										WEIGHT lbs
		A	A1	ØB	ØB1	ØD	E	K	□M	ØO	P	
2	F07, F10	8.50	3.50	6.50	5.75	2.0	7.99	6.61	0.19	0.79	0.87	33
3	F07, F10, F12, F14	11.12	5.55	8.25	7.87	3.0	8.86	7.48	0.19	0.79	0.87	70
4	F10, F12, F14	12.00	6.00	10.00	10.00	4.0	11.65	9.84	0.25	0.98	1.09	128
6	F14, F16	15.88	7.93	12.50	13.90	6.0	14.69	12.01	0.38	1.57	1.74	276
8	F14, F16, F25	19.75	9.80	15.00	18.19	8.0	17.83	15.16	0.38	1.57	1.74	496
10	F14, F16, F25, F30	22.38	11.18	17.50	22.83	10.0	22.13	18.58	0.50	2.17	2.39	727
12	F14, F16, F25, F30	25.50	12.76	20.50	25.67	12.0	23.82	20.28	0.50	2.17	2.39	1345
14	F16, F25, F30, F35	30.00	15.00	23.00	27.56	13.4	29.17	23.90	0.75	2.95	3.27	1764
16	F16, F25, F30, F35	33.00	16.50	25.50	31.46	15.4	30.67	24.92	0.88	3.35	3.73	2237
18	F30, F35	35.98	15.33	27.95	32.48	17.17	31.26	25.42	0.88	3.35	3.77	2744
20	F25, F30, F35, F40	39.02	17.99	30.51	35.67	19.17	34.69	28.54	0.88	3.74	4.17	3760
24	F35, F40	45.00	21.00	36.02	41.73	23.19	42.91	34.84	1.25	4.72	5.38	5858

## EN PN 10 - 40

Type	DN	DIMENSIONS, mm																WEIGHT kg	
		ØD	A	A1	ØB	ØB1	E	K	M	N	ØO	P	S	T	U	V	W		C
PN10	450	436	864	432	615	800	794	648	22.23	146	85	94.63	330	21.3	M30	M20	M20	M27	981
	500	487	914	457	670	885	811.5	665.5	22.23	146	85	94.63	330	21.3	M30	M20	M20	M27	1288
	600	589	1067	533.5	780	1041	987	831	22.23	156	95	105.87	400	23.6	M30	M30	M24	M30	2037
PN16	450	436	864	432	640	800	794	648	22.23	146	85	94.63	330	21.3	M30	M20	M20	M27	1011
	500	487	914	457	715	885	811.5	665.5	22.23	146	85	94.63	330	21.3	M30	M20	M20	M27	1328
	600	589	1067	533.5	840	1041	987	831	22.23	156	95	105.87	400	23.6	M30	M30	M24	M30	2141
PN25	450	436	914	457	710	785	794	648	22.23	146	85	94.63	330	21.3	M30	M20	M20	M36	1249
	500	487	991	495.5	775	880	881	725	22.23	156	95	105.87	400	23.6	M30	M30	M24	M39	1692
	600	589	1143	571.5	915	1050	1090	885	31.75	205	120	136.54	460	23.6	M30	M30	M24	M39	2636
PN40	450	436	914	457	710	825	794	648	22.23	146	85	94.63	330	21.3	M30	M20	M20	M36	1249
	500	487	991	495.5	775	906	881	725	22.23	156	95	105.87	400	23.6	M30	M30	M24	M39	1692
	600	589	1143	571.5	915	1060	1090	885	31.75	205	120	136.54	460	23.6	M30	M30	M24	M39	2636



## Valve with manual gear operator series M

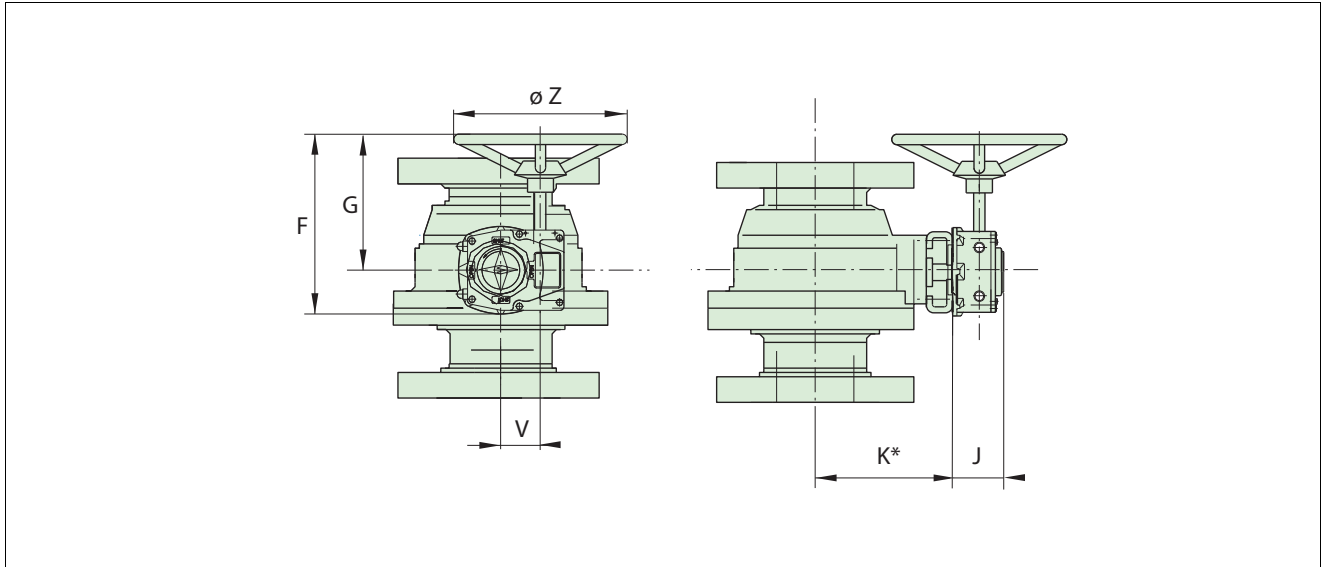


\*) see K dimensions from tables on pages 7 and 8.

Type	DIMENSIONS, mm					kg
	F	G	J	V	øZ	
M07	196	152	58	38	125	3
M10	297	239	67	52	200	5
M12	357	282	81	66	250	10
M14	435	345	93	89	457	18
M15	532	406	105	123	457	31
M16	642	466	126	154	610	45

Type	DIMENSIONS, inch					lbs
	F	G	J	V	øZ	
M07	7.72	5.98	2.28	1.52	4.92	6
M10	11.69	9.41	2.64	2.05	7.87	11
M12	14.06	11.10	3.19	2.63	9.84	21
M14	17.13	13.58	3.68	3.52	17.99	40
M15	20.94	15.98	4.15	4.84	17.99	68
M16	25.28	18.35	4.98	6.06	24.02	99

## Topwork assembly dimensions

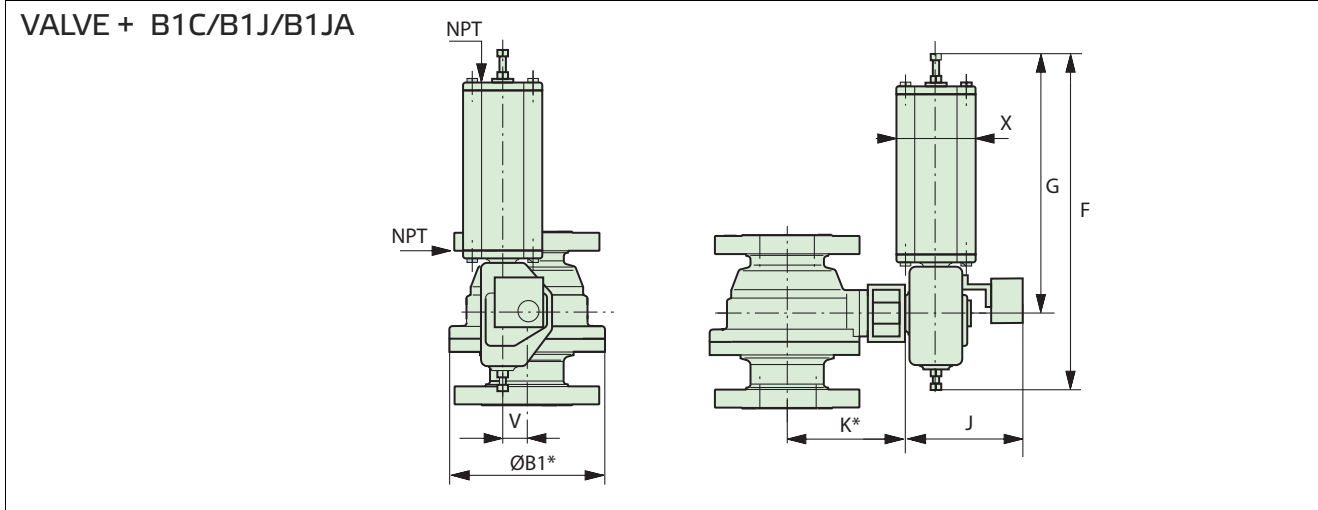

\*) See K and ØB1 dimensions from tables on page 7 and 8.

### B1C Actuator

Actuator	DIMENSIONS, mm					NPT	kg
	F	G	J	V	X		
B1C6	400	260	283	36	90	1/4	4.2
B1C9	455	315	279	43	110	1/4	9.6
B1C11	540	375	290	51	135	3/8	16
B1C13	635	445	316	65	175	3/8	31
B1C17	770	545	351	78	215	1/2	54
B1C20	840	575	385	97	215	1/2	73
B1C25	1040	710	448	121	265	1/2	131
B1C32	1330	910	525	153	395	3/4	256
B1C40	1660	1150	595	194	505	3/4	446
B1C50	1970	1350	690	242	610	1	830

### B1J/B1JA Actuator

Actuator	DIMENSIONS, mm					NPT	kg
	F	G	J	V	X		
B1J/B1JA6	485	368	273	36	110	3/8	8
B1J/B1JA8	560	420	279	43	135	3/8	17
B1J/B1JA10	650	490	290	51	175	3/8	30
B1J/B1JA12	800	620	316	65	215	1/2	57
B1J/B1JA16	990	760	351	78	265	1/2	100
B1J/B1JA20	1200	935	358	97	395	3/4	175
B1J/B1JA25	1530	1200	448	121	505	3/4	350
B1J/B1JA32	1830	1410	525	153	540	1	671
B1J/B1JA40	2095	1578	580	194	724	1	1100

Actuator	DIMENSIONS, inch					NPT	lbs
	F	G	J	V	X		
B1C6	15.75	10.24	11.14	1.42	3.54	1/4	9
B1C9	17.91	12.40	10.98	1.69	4.33	1/4	21
B1C11	21.26	14.76	11.42	2.01	5.31	3/8	35
B1C13	25.00	17.52	12.44	2.56	6.89	3/8	68
B1C17	30.31	21.46	13.82	3.07	8.46	1/2	119
B1C20	33.07	22.64	15.16	3.82	8.46	1/2	161
B1C25	40.94	27.95	17.64	4.76	10.43	1/2	289
B1C32	52.36	35.83	20.67	6.02	15.55	3/4	564
B1C40	65.35	45.28	23.43	7.64	19.88	3/4	983
B1C50	77.56	53.15	27.17	9.53	24.02	1	1829

Actuator	DIMENSIONS, inch					NPT	lbs
	F	G	J	V	X		
B1J/B1JA6	19.09	14.49	10.75	1.42	4.33	3/8	20
B1J/B1JA8	22.05	16.54	10.98	1.69	5.31	3/8	37
B1J/B1JA10	25.59	19.29	11.42	2.01	6.89	3/8	66
B1J/B1JA12	31.50	24.41	12.44	2.56	8.46	1/2	126
B1J/B1JA16	38.98	29.92	13.82	3.07	10.43	1/2	220
B1J/B1JA20	47.24	36.81	14.09	3.82	15.55	3/4	386
B1J/B1JA25	60.24	47.24	17.64	4.76	19.88	3/4	771
B1J/B1JA32	72.05	55.51	20.67	6.02	21.26	1	1479
B1J/B1JA40	82.48	62.13	22.8	7.64	28.5	1	2424

## HOW TO ORDER

1.	2.	3.	4.	5.	6.	7.	8.	9.	10.	11.
XG	06	D	W	TA	S6	PJ	S	A	B	E

1. sign	VALVE SERIES & STYLE & FACE-TO-FACE
XM	Full bore, trunnions, f-to-f ANSI B 16.10, Table 1, long pattern, ASME 150.
XG	Full bore, trunnions, f-to-f ANSI B 16.10, Table 2, long pattern, ASME 300.

2. sign	SIZE		
ASME VALVES		EN VALVES	
2. sign	NPS	2. sign	DN
02	2"	050	50
03	3"	080	80
04	4"	100	100
06	6"	150	150
08	8"	200	200
10	10"	250	250
12	12"	300	300
14	14"	350	350
16	16"	400	400
18	18"	450	450
20	20"	500	500
24	24"	600	600

3. sign	PRESSURE CLASS
C	ASME Class 150
D	ASME Class 300
J	PN 10
K	PN 16
L	PN 25
M	PN 40

4. sign	END CONNECTION STYLE
W	Raised face, ASME B 16.5, (Ra 3.2 - 6.3/RMS 125 - 250) standard with ASME flanges.
C	EN 1092 -1 Type B1, raised face, standard with EN flanges.

5. sign	CONSTRUCTION & APPLICATION
TA	Standard construction. Live loaded packing.
TE	Single seated. Otherwise standard.
TQ	Q-Trim construction. Otherwise standard
EQ	Single seated, Q-Trim construction.
2G	Q2-trim for gas application, single seated construction, otherwise standard construction
TZ	BAM tested non-metallic parts, for oxygen service. Double seated. Metal bearings; cobalt based alloy. Live loaded graphite packing. Temperature range -50...+200 °C. Max pressure per body rating. Oxygen cleaning acc. to Neles internal procedure.

6. sign	BODY MATERIAL
J2	ASTM A216 gr WCB
S6	ASTM A351 gr CF8M
J5	ASTM A217 gr C5

7. sign	BALL / COATING & STEM MATERIAL
PJ	316SS / Hard Chrome & 17-4PH
PP	316SS & 17-4PH
PV	316SS/Tungsten carbide, TC2
PX	316SS / Chrome carbide, CrC & 17-4PH
PR	316SS / WC-CO & 17-4PH
PL	316SS / NiBo & 17-4PH

NOTE ! Balls with coating (/) are normally used in metal seated valves.

8. sign	SEAT TYPES AND BACK SEAL/SPRING MATERIALS			
	Seat type	Back seal type	Spring	Back-up ring
S	S, metal, general service	O-ring	Inconel 625	PTFE
L	L, metal, Polymer proof	Graphite / O-ring	----	PTFE
B	B, metal, solid proof	Graphite/O-ring	Inconel 625	PTFE
K	K, metal, solid proof	Graphite/graphite	Inconel 625	----
G	G, metal, solid proof	Graphite/graphite	Inconel 625	----
H	H, metal, bellows	Graphite	----	----
T	T, soft, general service	O-ring	Inconel 625	PTFE
D	D, soft fire safe service	Graphite / O-ring	Inconel 625	PTFE

9. sign	SEAT AND COATING MATERIAL	
	Seat material	Coating
A	Type 316 stainless steel with S, B and K type seats AVESTA 248SV with H type seat.	Cobalt based hard facing
B	Type 316 stainless steel with S, B and K type seats AVESTA 248SV with H type seat.	Chrome Carbide, CrC-LF
V	Type 316 stainless steel with S, B, K and L type seats AVESTA 248SV with H type seat.	Tungsten Carbide, TC2
R	Type 316 stainless steel with S, B, K and L type seats AVESTA 248SV with H type seat.	Tungsten Carbide, WC-CO
F	F6NM with H-type seat for high temperature NACE service.	Chrome Carbide, CrC-LF
	Seat material	Insert
	T	Type 316 stainless steel.
M	Type 316 stainless steel.	Filled PTFE
N	Type 316 stainless steel.	Polyamid

10. sign	BEARING AND SEAL MATERIALS				
	Trunnion bearing	Packings	Body gaskets	O-rings	Thrust bearing
A	Reinforced PTFE	V-rings PTFE	PTFE	Viton GF	Reinforced PTFE / Metal
B	Reinforced PTFE	Graphite	Graphite	Viton GF	Reinforced PTFE / Metal
C	Metal	V-rings PTFE	PTFE	Viton GF	Metal
D	Metal	Graphite	Graphite	Viton GF	Metal
H	Reinforced PTFE	V-rings PTFE	PTFE	EPDM	Reinforced PTFE / Metal
S	Reinforced PTFE	Graphite	Graphite	EPDM	Reinforced PTFE / Metal
U	SS + WC-CO	Graphite	Graphite	Viton GF	Metal
V	SS + WC-CO	Graphite	Graphite	Viton GF	Metal
T	SS + WC-CO	Braided PTFE	Graphite	Viton GF	Metal

11. sign	BOLTING MATERIALS			
	Pressure retaining		Packing gland bolting	
	Studs	Nuts	Studs	Nuts
Standard for sizes DN 50 - 400/NPS 2 - 16				
E*	B8M	8M	gr. 660	gr. 660
T**	L7M	2HM	B7	2H
Standard for sizes DN 450 - 600/NPS 18- 24				
D *	B8M	8M	B8M	8M
F **	L7M	2HM	L7M	2HM

\* Bolting materials for stainless steel body

\*\* Bolting materials for carbon and low alloy steel body

**Valmet Flow Control Oy**

Vanha Porvoontie 229, 01380 Vantaa, Finland.

Tel. +358 10 417 5000.

[www.valmet.com/flowcontrol](http://www.valmet.com/flowcontrol)

Subject to change without prior notice.

Neles, Neles Easyflow, Jamesbury, Stonel, Valvcon and Flowrox, and certain other trademarks, are either registered trademarks or trademarks of Valmet Oyj or its subsidiaries in the United States and/or in other countries.

For more information [www.neles.com/trademarks](http://www.neles.com/trademarks)

